



GRAVELY®

2024




GRAVELY

SALES • SERVICE

BUILT TO

LAST

With over one-hundred years of ingenuity and reliability hard-coded into the DNA of every Gravelly product, Gravellys are built to mow the distance. For all day performance kilometre after kilometre, comfort and durability are at the forefront of design to get the big jobs done time after time.

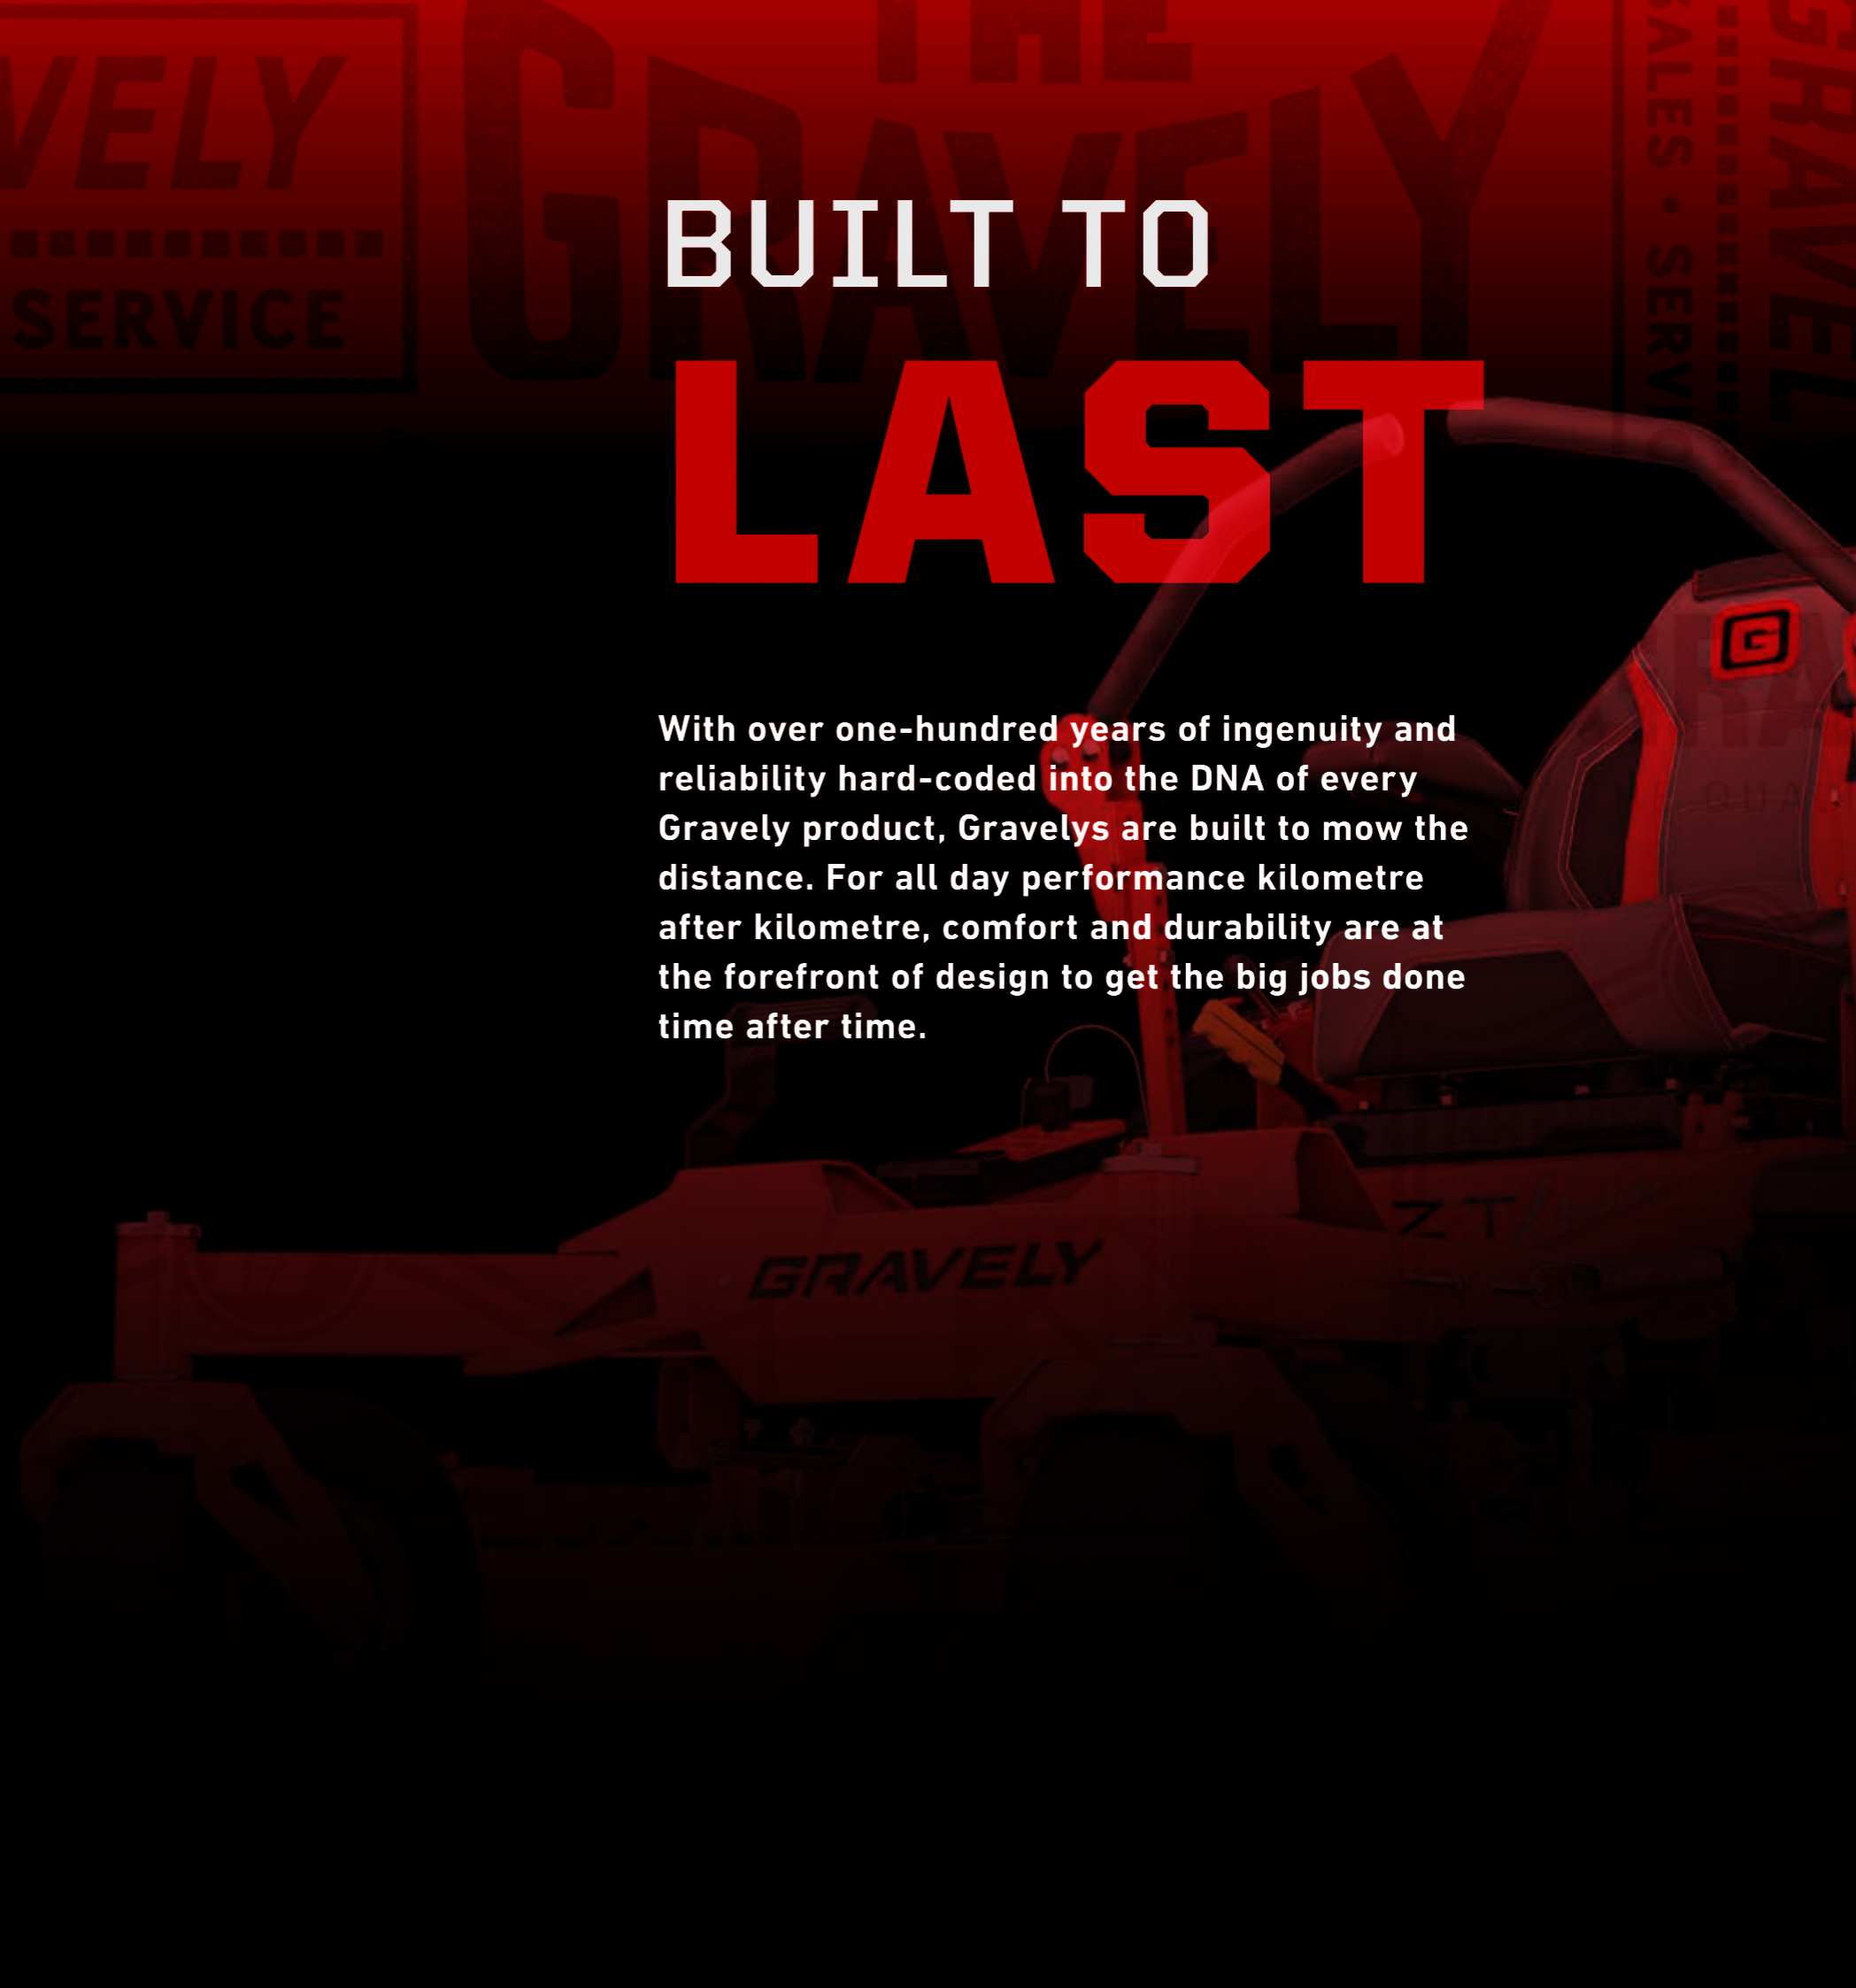



X-FACTOR[®] 3 DECK

Made with 7 and 10-gauge steel, the X-Factor[®] 3 deck is specially designed for better grass dispersion thanks to its larger discharge opening, integrated baffles, and sloped front end. Reinforced spindle mounts protect blade operation while the six recessed anti-scalp wheels protect the turf on uneven terrain. Its flip-up rubber chute makes it easy to drive through gates and around obstacles.

Available in ZT-HD, PRO-STANCE, PRO-TURN ZX, PRO-TURN 300, PRO-TURN 500, PRO-TURN 600, PRO-TURN EV



FULLY WELDED TUBULAR FRAME

One glance and you can see its strength and durability. Its wide front rail distributes weight for superior balance. It also supports the deck lift for easy engagement.

Available in ZT-X, ZT-XL, ZT-HD, Z-STANCE, PRO-STANCE, PRO-TURN ZX, PRO-TURN 300, PRO-TURN 500, PRO-TURN 600, PRO-TURN EV



HYDRO-GEAR[®] SERVICEABLE EZT[®] TRANSAXLES

Serviceable transaxles have optimised cooling to ensure smooth running for years to come. New service ports allow oil changes to help extend the life of your machine.

Available in ZT-X





EDGE



AVAILABLE IN:

34" **42"**

SMALLER LAWNS ALSO DESERVE BIG PERFORMANCE.

Comfort, durability, and Zero-Turn versatility are all wrapped up in a manageable, compact design. The EDGE's high-impact graphics announce to your neighbours that you take pride in your lawn, while at the same time remind them why yours is always the best-looking one on the block.

2 YEARS
OR
150 HOURS
WARRANTY



7-Position Height Of Cut

A foot operated deck lift system makes cutting height adjustments a breeze. Hand lever can adjust the deck in 1/2" increments.



Mower Deck

The 34-inch stamped deck is sized to fit through standard gates and strong enough to handle medium-sized lawns with ease. The durable 42-inch, 11-gauge fabricated decks were inspired by commercial deck designs.

	EDGE 34	EDGE 42
MODEL NUMBER	915281	915283
ENGINE	BRIGGS & STRATTON® EXI2000	BRIGGS & STRATTON® EXI2000
HORSEPOWER	20 HP	20 HP
DISPLACEMENT	656 CC	656 CC
DRIVE SYSTEM	HYDRO-GEAR® EZT TRANSAXLES	HYDRO-GEAR® EZT TRANSAXLES
FUEL CAPACITY	7.5 L	7.5 L
GROUND SPEED (Approx. Km/H) (Forward/Reverse)	0 - 9.7 KM/H / 0 - 4.8 KM/H	0 - 9.7 KM/H / 0 - 4.8 KM/H
STARTER	ELECTRIC	ELECTRIC
DECK		
DECK MATERIAL	12 GA. STEEL	11 GA. STEEL
DECK CONSTRUCTION	STAMPED	FABRICATED
NUMBER OF SPINDLES	2	2
BLADE TIP SPEED (FPM)	18,179	17,126
SPINDLE HOUSING	STEEL	FORGED ALUMINUM
SPINDLE SHAFT	STEEL	STEEL
SPINDLE BEARINGS	SEALED	SEALED
DECK ENGAGEMENT	ELECTRIC WARNER	ELECTRIC WARNER
DECK LIFT SYSTEM	FOOT OPERATED	FOOT OPERATED
CUTTING WIDTH	34 IN	42 IN
CUTTING HEIGHTS	38 MM - 114 MM	38 MM - 114 MM
CUTTING POSITIONS	7	7
WHEELS		
FRONT	11 IN X 4.5 IN	11 IN X 4.5 IN
REAR	18 IN X 6.5 IN - 8 IN	18 IN X 8.5 IN - 8 IN
MACHINE		
WEIGHT	201.8KG	225.8KG
LENGTH	1727 MM	1727 MM
WIDTH (W/O CHUTE)	1062 MM	1176 MM
WIDTH (W/ CHUTE)	1138 MM	1392 MM
HEIGHT	1021 MM	1021 MM
WARRANTY		
UNIT	MACHINE WARRANTY - 2 YEARS / 150 HOURS	MACHINE WARRANTY - 2 YEARS / 150 HOURS
ATTACHMENTS & ACCESSORIES	2 BUCKET BAGGER, MULCHING KIT, TRAILER HITCH KIT	



ZT X



AVAILABLE IN:

42" **48"** **52"**

3YR
THREE YEAR OR 300 HOUR
WARRANTY

BRING SOME PROFESSIONAL STANDARDS TO YOUR LAWN.

This is the residential lawnmower that's often mistaken for a commercial mowing machine with its heavy-duty construction, professional features, and legendary Gravely performance. When you have a ZT X on your lawn, your neighbourhood will know you're upping your lawn game to the next level.



One-piece, Fully-Welded Tubular Chassis

This all-new chassis displays strength and durability with its closed tube frame rails and fully welded construction techniques influenced by our commercial applications.



X-Factor® 11-gauge Fabricated Deck

The all new 4 1/2 inch-deep deck optimises airflow, and its reinforced sloped nose allows more room for grass to stand up ahead of the cutting chamber. Caged anti-scalp wheels make your lawn less susceptible to damage from minor bumps and scrapes.



Hydro-Gear® Serviceable EZT® Transaxles

Optimised cooling to ensure smooth running for years to come. New service ports allow oil changes to help extend the life of your machine.

	ZT X 42	ZT X 48	ZT X 52
MODEL NUMBER	918008	918009	918011
ENGINE	KAWASAKI® FR 651V	KAWASAKI® FR 651V	KAWASAKI® FR 691V
HORSEPOWER	21.5 HP	21.5 HP	23 HP
DISPLACEMENT	726 CC	726 CC	726 CC
DRIVE SYSTEM	HYDRO-GEAR® SERVICEABLE EZT®	HYDRO-GEAR® SERVICEABLE EZT®	HYDRO-GEAR® SERVICEABLE EZT®
FUEL CAPACITY	13.2 L	13.2 L	15.9 L
GROUND SPEED (Approx. Km/H) (Forward/Reverse)	0 - 11.3 KM/H / 0 - 4.8 KM/H	0 - 11.3 KM/H / 0 - 4.8 KM/H	0 - 11.3 KM/H / 0 - 4.8 KM/H
STARTER	ELECTRIC	ELECTRIC	ELECTRIC
DECK			
DECK MATERIAL	11 GA. STEEL	11 GA. STEEL	11 GA. STEEL
DECK CONSTRUCTION	FABRICATED X-FACTOR®	FABRICATED X-FACTOR®	FABRICATED X-FACTOR®
NUMBER OF SPINDLES	3	3	3
BLADE TIP SPEED (FPM)	17,821	17,887	18,355
SPINDLE HOUSING	FORGED ALUMINUM	FORGED ALUMINUM	FORGED ALUMINUM
DECK ENGAGEMENT	ELECTRIC WARNER	ELECTRIC WARNER	ELECTRIC WARNER
DECK LIFT SYSTEM	FOOT OPERATED	FOOT OPERATED	FOOT OPERATED
CUTTING WIDTH	42"	48"	52"
CUTTING HEIGHTS	38 MM - 114 MM	38 MM - 114 MM	38 MM - 114 MM
CUTTING POSITIONS	13	13	13
WHEELS			
FRONT	11 IN X 6 IN - 5 IN SMOOTH PNEUMATIC	11 IN X 6 IN - 5 IN SMOOTH PNEUMATIC	11 IN X 6 IN - 5 IN SMOOTH PNEUMATIC
REAR	20 IN X 8 IN - 8 IN AGGRESSIVE TREAD TURF	20 IN X 10 IN - 8 IN AGGRESSIVE TREAD TURF	20 IN X 10 IN - 8 IN AGGRESSIVE TREAD TURF
MACHINE			
WEIGHT	303 KG	308 KG	315 KG
LENGTH	1892 MM	1892 MM	1892 MM
WIDTH (W/O CHUTE)	1146 MM	1298 MM	1168 MM
WIDTH (W/ CHUTE)	1428 MM	1582 MM	1694 MM
HEIGHT	1168 MM	1168 MM	1168 MM
WARRANTY			
UNIT	MACHINE WARRANTY - 3 YEARS OR 300 HOURS	MACHINE WARRANTY - 3 YEARS OR 300 HOURS	MACHINE WARRANTY - 3 YEARS OR 300 HOURS
ATTACHMENTS & ACCESSORIES	2 BUCKET BAGGER, TRAILER HITCH KIT, MULCHING KIT, WHEEL COVER KIT		



ZT XL



AVAILABLE IN:

42" **48"**

4YR
FOUR YEAR OR 400 HOUR
WARRANTY

AN UPGRADE TO ANY PROPERTY.

Built for big jobs, the ZT XL has been redesigned with an 11 gauge fabricated X-Factor deck, vibration isolators and a high-back seat to combine professional cut quality, durability and comfort while mowing multiple acres.



One-piece, Fully-Welded Tubular Chassis

This all-new chassis displays strength and durability with its closed tube frame rails and fully welded construction techniques influenced by our commercial applications.



X-Factor® 11-gauge Fabricated Deck

The 4 1/2 inch-deep deck optimises airflow, and its reinforced sloped nose allows more room for grass to stand up ahead of the cutting chamber. Caged anti-scalp wheels make your lawn less susceptible to damage from minor bumps and scrapes.



New Taller and Wider Seat with Padded Armrests

Ready for the long mow! A 22" tall seat provides more back support and is mounted on a taller seat base to make it easier to stand up and sit down. Armrests deliver extra cushion for more comfort.

	ZT XL 42	ZT XL 48
MODEL NUMBER	918012	918013
ENGINE	KAWASAKI® FR 651V	KAWASAKI® FR 691V
HORSEPOWER	21.5 HP	23 HP
DISPLACEMENT	726 CC	726 CC
DRIVE SYSTEM	HYDRO-GEAR® ZT-2800®	HYDRO-GEAR® ZT-2800®
FUEL CAPACITY	13.2 L	13.2 L
GROUND SPEED (Approx. Km/H) (Forward/Reverse)	0 - 11.3 KM/H / 0 - 4.8 KM/H	0 - 11.3 KM/H / 0 - 4.8 KM/H
STARTER	ELECTRIC	ELECTRIC
DECK		
DECK MATERIAL	11 GA. STEEL	11 GA. STEEL
DECK CONSTRUCTION	FABRICATED X-FACTOR®	FABRICATED X-FACTOR®
NUMBER OF SPINDLES	3	3
BLADE TIP SPEED (FPM)	17,821	17,887
SPINDLE HOUSING	FORGED ALUMINUM	FORGED ALUMINUM
DECK ENGAGEMENT	ELECTRIC WARNER	ELECTRIC WARNER
DECK LIFT SYSTEM	FOOT OPERATED	FOOT OPERATED
CUTTING WIDTH	42"	48"
CUTTING HEIGHTS	38 MM - 114 MM	38 MM - 114 MM
CUTTING POSITIONS	13	13
WHEELS		
FRONT	11 IN X 6 IN - 5 IN SMOOTH PNEUMATIC	11 IN X 6 IN - 5 IN SMOOTH PNEUMATIC
REAR	20 IN X 8 IN - 8 IN AGGRESSIVE TREAD TURF	20 IN X 10 IN - 8 IN AGGRESSIVE TREAD TURF
MACHINE		
WEIGHT	306.0KG	312.5KG
LENGTH	1892 MM	1892 MM
WIDTH (W/O CHUTE)	1146 MM	1298 MM
WIDTH (W/ CHUTE)	1428 MM	1582 MM
HEIGHT	1194 MM	1194 MM
WARRANTY		
UNIT	MACHINE WARRANTY - 4 YEARS OR 400 HOURS	MACHINE WARRANTY - 4 YEARS OR 400 HOURS
ATTACHMENTS & ACCESSORIES	2 BUCKET BAGGER, TRAILER HITCH KIT, MULCHING KIT, WHEEL COVER KIT	



ZT HD



AVAILABLE IN:

44" **52"** **60"**



THE MOWER KNOWN FOR MAKING NEIGHBOURS JEALOUS.

More style, more comfort, more speed, and more precision have made the ZT HD one of the top selling machines in its class. Built to commercial standards for power and durability encompassing a fabricated X-Factor® 3 cutting deck for a premium performance. The only thing that makes it a residential mower is its address.



X-Factor® III Fabricated Deck

Made with 10-gauge steel and specially designed for better grass dispersion thanks to its larger discharge opening, integrated baffles, and sloped front end.



Powerful Engine

Kawasaki® Engines are best-in-class and part of the trusted Kawasaki® FR line.



Fully Welded Tubular Frame

Automotive-style frame is constructed of enclosed rectangular tubing and is fully welded for superior durability.

	ZT HD 44	ZT HD 52	ZT HD 60
MODEL NUMBER	991266	991270	991272
ENGINE	KAWASAKI® FR 651V	KAWASAKI® FR 691V	KAWASAKI® FR 730V
HORSEPOWER	21.5 HP	23 HP	24 HP
DISPLACEMENT	726 CC	726 CC	726 CC
DRIVE SYSTEM	HYDRO-GEAR® ZT-3100 TRANSAXLES	HYDRO-GEAR® ZT-3100 TRANSAXLES	HYDRO-GEAR® ZT-3100 TRANSAXLES
FUEL CAPACITY	18.9 L	18.9 L	18.9 L
GROUND SPEED (Approx. Km/H) (Forward/Reverse)	0 - 12.9 KM/H / 0 - 6.4 KM/H	0 - 12.9 KM/H / 0 - 6.4 KM/H	0 - 12.9 KM/H / 0 - 6.4 KM/H
STARTER	ELECTRIC	ELECTRIC	ELECTRIC
DECK			
DECK MATERIAL	10 GA. STEEL	10 GA. STEEL	10 GA. STEEL
DECK CONSTRUCTION	FABRICATED X-FACTOR® 3	FABRICATED X-FACTOR® 3	FABRICATED X-FACTOR® 3
NUMBER OF SPINDLES	3	3	3
BLADE TIP SPEED (FPM)	18,576	18,136	18,464
SPINDLE HOUSING	FORGED ALUMINUM	FORGED ALUMINUM	FORGED ALUMINUM
SPINDLE BEARINGS	BALL BEARING	BALL BEARING	BALL BEARING
DECK ENGAGEMENT	ELECTRIC WARNER	ELECTRIC WARNER	ELECTRIC WARNER
DECK LIFT SYSTEM	FOOT OPERATED	FOOT OPERATED	FOOT OPERATED
CUTTING WIDTH	44"	52"	60"
CUTTING HEIGHTS	38 MM - 127 MM	38 MM - 127 MM	38 MM - 127 MM
CUTTING POSITIONS	15	15	15
WHEELS			
FRONT	13 IN X 6.5 IN - 6 IN SMOOTH PNEUMATIC	13 IN X 6.5 IN - 6 IN SMOOTH PNEUMATIC	13 IN X 6.5 IN - 6 IN SMOOTH PNEUMATIC
REAR	22 IN X 10 IN - 12 IN TURF	22 IN X 10 IN - 12 IN TURF	22 IN X 12 IN - 12 IN TURF
MACHINE			
WEIGHT	365.0KG	371.0KG	381.0KG
LENGTH	2007 MM	2007 MM	2007 MM
WIDTH (W/O CHUTE)	1209 MM	1428 MM	1618 MM
WIDTH (W/ CHUTE)	1494 MM	1710 MM	1900 MM
HEIGHT	1194 MM	1194 MM	1194 MM
WARRANTY			
UNIT	MACHINE WARRANTY - 4 YEARS OR 500 HOURS	MACHINE WARRANTY - 4 YEARS OR 500 HOURS	MACHINE WARRANTY - 4 YEARS OR 500 HOURS
ATTACHMENTS & ACCESSORIES	2-BIN BAGGER, BAGGER MOUNT KIT, TRAILER HITCH KIT, MULCHING KIT, WHEEL COVER KIT, ROPS KIT.		



Z-STANCE



AVAILABLE IN:

32"

4YR
FOUR YEAR OR 500 HOUR
WARRANTY

STAND TALL ON THE TURF.

Ride with pride and deliver that perfect commercial quality cut. This is a powerful commercial stand-on mower that's easy to manoeuvre and a breeze to maintain. You take a stand for comfort, and durability when you're on the Z-Stance 32.



Adjustable Cruise Bar
Easily limit and expand the machine's maximum speed in tight working environments.



Low Centre Of Gravity
Weight is distributed better to give you hillside stability and confidence in your ride.



Flip-up Suspension Platform
The flip-up suspension platform lets you stand comfortably all day or easily transition to a walk-behind and get some steps in.

	Z-STANCE 32
MODEL NUMBER	994160
ENGINE	KAWASAKI® FS 600 V-TWIN
HORSEPOWER	18.5 HP
DISPLACEMENT	603 CC
DRIVE SYSTEM	HYDRO-GEAR® ZT-3100
FUEL CAPACITY	17.03 L
GROUND SPEED (Approx. Km/H) (Forward/Reverse)	0 - 11.3 KM/H / 0 - 4.8 KM/H
STARTER	ELECTRIC
DECK	
DECK MATERIAL	7 GA. STEEL
DECK CONSTRUCTION	X-FACTOR II
NUMBER OF SPINDLES	2
BLADE TIP SPEED (FPM)	18,220
SPINDLE HOUSING	FORGED ALUMINUM
SPINDLE SHAFT	STEEL
SPINDLE BEARINGS	BALL BEARING
DECK ENGAGEMENT	ELECTRIC CLUTCH
DECK LIFT SYSTEM	MANUAL
CUTTING WIDTH	32"
CUTTING HEIGHTS	50 MM - 127 MM
CUTTING POSITIONS	13
WHEELS	
FRONT	11 IN X 5 IN - 6 IN PNEUMATIC
REAR	20 IN X 6.5 IN - 8 IN TURF
MACHINE	
WEIGHT	303.0KG
LENGTH	1664 MM
WIDTH (W/O CHUTE)	833 MM
WIDTH (W/ CHUTE)	1138 MM
HEIGHT	1207 MM
WARRANTY	
UNIT	MACHINE WARRANTY - 4 YEARS OR 500 HOURS COMMERCIAL
ATTACHMENTS & ACCESSORIES	MULCHING KIT, DISCHARGE BAFFLE KIT



PRO-STANCE® RANGE




AVAILABLE IN:

36" **48"**



STEP UP TO GREATNESS.

The perfect blend of power and performance for environments that demand quick on-and-off versatility. The deck adjusts easily, and the suspension platform absorbs vibration for all-day comfort.



Height-of-Cut System
10-gauge steel and specially designed for better grass dispersion thanks to its larger discharge opening, integrated baffles, and sloped front end.



Adjustable Cruise Bar
Kawasaki® Engines are best-in-class and part of the trusted Kawasaki® FR line.



Added Efficiency
Automotive-style frame is constructed of enclosed rectangular tubing and is fully welded for superior durability.

	PRO-STANCE 36	PRO-STANCE 48
MODEL NUMBER	994149	994150
ENGINE	KAWASAKI® FS 600 V-TWIN	KAWASAKI® FX 730 V-TWIN
HORSEPOWER	18.5 HP	23.5 HP
DISPLACEMENT	603 CC	726 CC
DRIVE SYSTEM	HYDRO-GEAR® ZT-3100 TRANSAXLE	HYDRO-GEAR® ZT-3400 TRANSAXLE
FUEL CAPACITY	22.7 L	34.01 L
GROUND SPEED (Approx. Km/H) (Forward/Reverse)	0 - 12.9 KM/H / 0 - 4.8 KM/H	0 - 14.4 KM/H / 0 - 6.4 KM/H
STARTER	ELECTRIC	ELECTRIC
DECK		
DECK MATERIAL	7 GA. STEEL	7 GA. STEEL
DECK CONSTRUCTION	FABRICATED X-FACTOR® 3	FABRICATED
NUMBER OF SPINDLES	2	3
BLADE TIP SPEED (FPM)	18,220	18,000
SPINDLE HOUSING	FORGED ALUMINUM	FORGED ALUMINUM
SPINDLE SHAFT	STEEL	STEEL
SPINDLE BEARINGS	BALL BEARING	BALL BEARING
DECK ENGAGEMENT	ELECTRIC CLUTCH	ELECTRIC CLUTCH
DECK LIFT SYSTEM	MANUAL	MANUAL
CUTTING WIDTH	36"	48"
CUTTING HEIGHTS	38 MM - 127 MM	38 MM - 127 MM
CUTTING POSITIONS	15	15
WHEELS		
FRONT	11 IN X 4.0 IN - 5 IN SEMI-PNEUMATIC	16 IN X 6.5 IN - 6 IN SEMI-PNEUMATIC
REAR	18 IN X 8.5 IN - 8 IN RADIAL	20 IN X 10.5 IN - 8 IN RADIAL
MACHINE		
WEIGHT	351.9KG	396.0KG
LENGTH	1511 MM	1600 MM
WIDTH (W/O CHUTE)	927 MM	1270 MM
WIDTH (W/ CHUTE)	1245 MM	1581 MM
HEIGHT	1219 MM	1219 MM
WARRANTY		
UNIT	MACHINE WARRANTY - 5 YEARS / 1000 HOURS	MACHINE WARRANTY - 5 YEARS / 1000 HOURS
DECK SHELL & FRAME	LIMITED LIFETIME	LIMITED LIFETIME
ATTACHMENTS & ACCESSORIES	MULCHING KIT, DISCHARGE BAFFLE KIT, CATCHER	

PRO TURN[®] EV

Powered by FusionCore - the industry's first swappable lithium-ion battery system.

The EV's four swappable batteries deliver the all-day, reliable high-performance power you need in a commercial mower. No pullies, belts, engine oil changes, or driving vibrations. They've been replaced with the quiet hum of success.



CHARGING INTO A NEW ERA OF MOWING



FusionCore QuikSwap Batteries

FusionCore QuikSwap batteries are designed with flexibility in mind, ensuring you and your crew have the ability to continue cutting all day and beyond. Once again, Gravelly is driving innovation and taking full charge of the new electric frontier.



X3 Constant Drive Spindles

Our proprietary spindles are designed to prevent motor damage by absorbing blade impact, protecting the machine from those unavoidable, accidental run-ins with ordinary obstacles. Spindles are easily serviceable, allowing you to rebuild and not replace.



Next-Gen Wheel Drives

Commercial durability and comfort reign supreme. Transaxles are driven with a brushless electric drive motor coupled with a planetary gearbox that increases torque. Your ride will feel the same as a gas-powered machine...minus the vibration, noise and exhaust.



PRO-TURN® EV SD



AVAILABLE IN:

48" **60"**

5YR
FIVE YEAR OR 1500 HOUR
WARRANTY
NO HOUR LIMIT FOR THE FIRST TWO YEARS
LIMITED LIFETIME DECK SHELL & FRAME

IT HAS QUIETLY SILENCED ANY DOUBT.

Powered by the superior battery technology from FusionCore™, the EV's four swappable batteries deliver all-day, reliable, high-performance power. Constructed from 7 gauge steel, the X-Factor® 3 reinforced 48" and 60" decks with side discharge, is exactly what you need from a commercial mower. You'll forget pullies, belts, engine oil changes, and driving vibrations even exist.



Powered by FusionCore™
- the industry's first
swappable lithium-ion
battery system.

	PRO-TURN® EV 48 SD	PRO-TURN® EV 60 SD
MODEL NUMBER	997005	997007
BATTERIES	4 - 16 KWH FUSION CORE LITHIUM ION	4 - 16 KWH FUSION CORE LITHIUM ION
WHEEL DRIVE MOTORS	5 KW PER MOTOR	5 KW PER MOTOR
SPINDLE MOTORS	3.5 KW PER MOTOR	3.5 KW PER MOTOR
DRIVE SYSTEM	PROPRIETARY ELECTRIC TRANSAXLES	PROPRIETARY ELECTRIC TRANSAXLES
GROUND SPEED (Approx. Km/H) (Forward/Reverse)	0 - 12.9 KM/H (Low Speed) - 0 - 17.7 KM/H (High Speed) / 0 - 6.4 KM/H (Low Speed) - 0 - 8.8 KM/H (High Speed)	0 - 12.9 KM/H (Low Speed) - 0 - 17.7 KM/H (High Speed) / 0 - 6.4 KM/H (Low Speed) - 0 - 8.8 KM/H (High Speed)
DECK		
DECK MATERIAL	7 GA. STEEL	7 GA. STEEL
DECK CONSTRUCTION	FABRICATED X-FACTOR® 3	FABRICATED X-FACTOR® 3
NUMBER OF SPINDLES	3	3
BLADE TIP SPEED (FPM)	18,000	18,000
SPINDLE HOUSING	CAST ALUMINUM	CAST ALUMINUM
SPINDLE BEARINGS	SERVICEABLE BOTTOM BEARING	SERVICEABLE BOTTOM BEARING
DECK ENGAGEMENT	ELECTRIC DC BRUSHLESS MOTORS	ELECTRIC DC BRUSHLESS MOTORS
CUTTING WIDTH	48"	60"
CUTTING HEIGHTS	38.1 MM - 127 MM	38.1 MM - 127 MM
CUTTING POSITIONS	15	15
WHEELS		
FRONT	13 IN X 6.5 IN - 6 IN SMOOTH	13 IN X 6.5 IN - 6 IN SMOOTH
REAR	22 IN X 10 IN - 12 IN RADIAL TURF	22 IN X 12 IN - 12 IN RADIAL TURF
FEATURES		
SEAT	HIGH BACK COMFORT WITH SUSPENSION	HIGH BACK COMFORT WITH SUSPENSION
FOLDABLE ROPS	STANDARD	STANDARD
MACHINE		
WEIGHT	572.0KG	595.0KG
LENGTH	2108 MM	2108 MM
WIDTH (W/O CHUTE)	1270 MM	1600 MM
WIDTH (W/ CHUTE)	1575 MM	1905 MM
HEIGHT (W/ ROPS EXT)	1829 MM	1829 MM
HEIGHT (W/ ROPS DOWN)	1245 MM	1245 MM
WARRANTY		
UNIT	MACHINE WARRANTY - 5 YEARS OR 1500 HOURS COMMERCIAL / NO HOUR LIMIT FIRST 2 YEARS	MACHINE WARRANTY - 5 YEARS OR 1500 HOURS COMMERCIAL / NO HOUR LIMIT FIRST 2 YEARS
DECK SHELL & FRAME	LIMITED LIFETIME	LIMITED LIFETIME
ATTACHMENTS & ACCESSORIES	FUSIONCORE PORTABLE CHARGER, FUSIONCORE REPLACEMENT BATTERY, FAST CHARGING KIT, LED HEADLIGHT KIT, BEACON LIGHT KIT.	



PRO-TURN® EV RD



AVAILABLE IN:

60"

5YR
FIVE YEAR OR 1500 HOUR
WARRANTY
NO HOUR LIMIT FOR THE FIRST TWO YEARS
LIMITED LIFETIME DECK SHELL & FRAME


IT HAS QUIETLY SILENCED ANY DOUBT.

Powered by the superior battery technology from FusionCore™, the EV's four swappable batteries deliver all-day, reliable, high-performance power. Constructed from 7 gauge steel, the X-Factor® 3 reinforced 60" deck with rear discharge, is exactly what you need from a commercial mower. You'll forget pulleys, belts, engine oil changes, and driving vibrations even exist.

Powered by FusionCore
- the industry's first
swappable lithium-ion
battery system.



	PRO-TURN® EV 60 RD
MODEL NUMBER	997010
BATTERIES	4 - 16 KWH FUSION CORE LITHIUM ION
WHEEL DRIVE MOTORS	5 KW PER MOTOR
SPINDLE MOTORS	3.5 KW PER MOTOR
DRIVE SYSTEM	PROPRIETARY ELECTRIC TRANSAXLES
GROUND SPEED (Approx. Km/H) (Forward/Reverse)	0 - 12.9 KM/H (Low Speed) - 0 - 17.7 KM/H (High Speed) / 0 - 6.4 KM/H (Low Speed) - 0 - 8.8 KM/H (High Speed)
DECK	
DECK MATERIAL	7 GA. STEEL
DECK CONSTRUCTION	FABRICATED X-FACTOR® 3
NUMBER OF SPINDLES	3
BLADE TIP SPEED (FPM)	18,000
SPINDLE HOUSING	CAST ALUMINUM
SPINDLE BEARINGS	SERVICEABLE BOTTOM BEARING
DECK ENGAGEMENT	ELECTRIC DC BRUSHLESS MOTORS
CUTTING WIDTH	60"
CUTTING HEIGHTS	38.1 MM - 127 MM
CUTTING POSITIONS	15
WHEELS	
FRONT	13 IN X 6.5 IN - 6 IN SMOOTH
REAR	22 IN X 12 IN - 12 IN RADIAL TURF
FEATURES	
SEAT	HIGH BACK COMFORT WITH SUSPENSION
FOLDABLE ROPS	STANDARD
MACHINE	
WEIGHT	601.4KG
LENGTH	2108 MM
WIDTH	1575 MM
HEIGHT (W/ ROPS EXT)	1829 MM
HEIGHT (W/ ROPS DOWN)	1245 MM
WARRANTY	
UNIT	MACHINE WARRANTY - 5 YEARS OR 1500 HOURS COMMERCIAL / NO HOUR LIMIT FIRST 2 YEARS
DECK SHELL & FRAME	LIMITED LIFETIME
ATTACHMENTS & ACCESSORIES	
	FUSIONCORE PORTABLE CHARGER, FUSIONCORE REPLACEMENT BATTERY, FAST CHARGING KIT, LED HEADLIGHT KIT, BEACON LIGHT KIT.

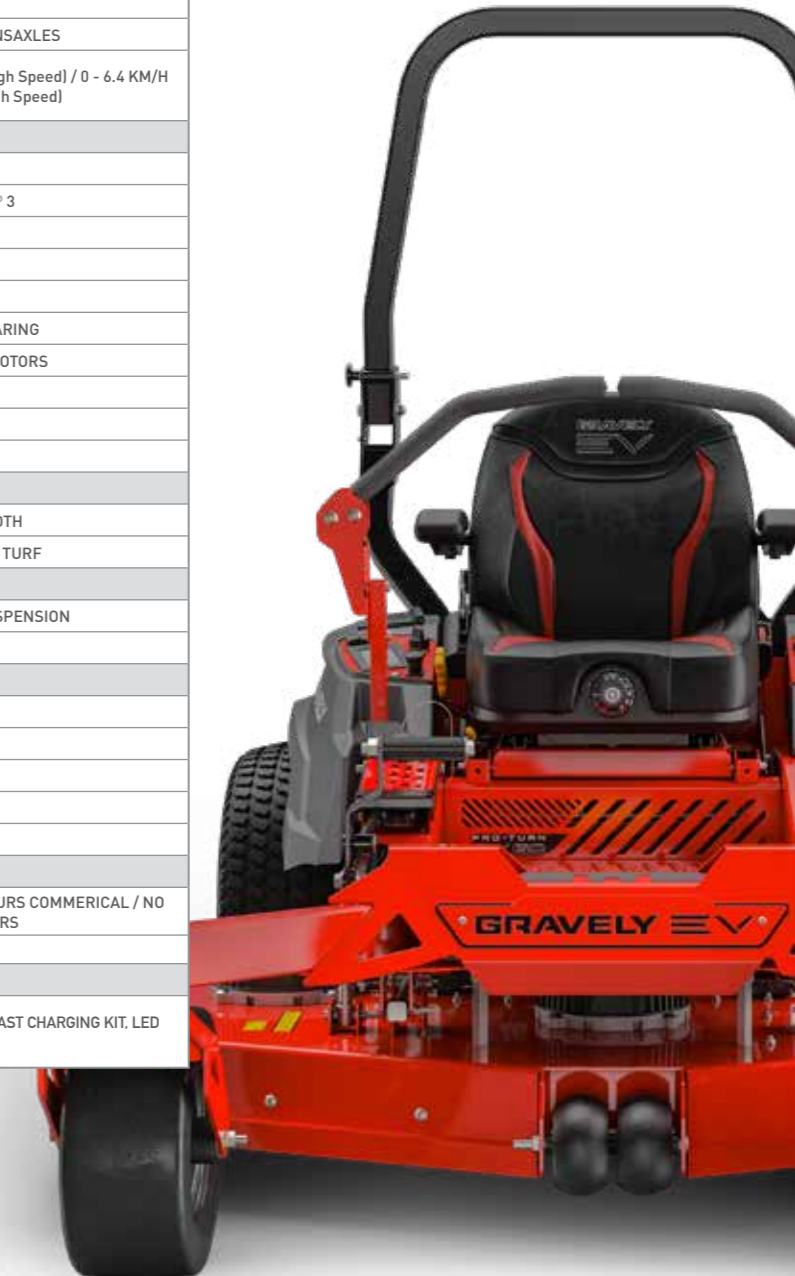



PRO-TURN® 600



AVAILABLE IN:

60" **72"**

5YR
FIVE YEAR OR 1500 HOUR
WARRANTY
NO HOUR LIMIT FOR THE FIRST TWO YEARS
LIMITED LIFETIME DECK SHELL & FRAME

The Pro-Turn® 600 is the latest and greatest addition to Gravely's new generation of zero turn mowers. We've pulled out all the stops to build a commercial machine focused on operator comfort without sacrificing its superior performance, and we wrapped it all up in a sleek new design. You'll cut more grass faster yet feel less fatigued at the end of the day. Once you hop on board, you'll never look back.



Suspension System

Makes you feel like you're part of the machine, giving you more control and comfort by removing bumps and jolts, even while mowing at higher speeds. That means less fatigue by the end of the day. It's also specially designed to self-adjust for less maintenance.



X-Factor® 3 Deck

A new deck has been completely redesigned for better grass dispersion. Its new look is constructed from seven-gauge steel to deliver years of solid performance.



Large Diameter Tyres

A On both the front and rear provide smoother ride and more traction on varying conditions.

	PRO-TURN® 660 EFI*	PRO-TURN® 672	
		NON - EFI	EFI*
MODEL NUMBER	992503	992502	992504
ENGINE	KAWASAKI® FX1000V-EFI	KAWASAKI® FX1000V	KAWASAKI® FX1000V-EFI
HORSEPOWER	38.5 HP	35 HP	38.5 HP
DISPLACEMENT	999 CC	999 CC	999 CC
DRIVE SYSTEM	PARKER HTG TRANSMISSION	PARKER HTG TRANSMISSION	
FUEL CAPACITY	48.1 L	48.1 L	
GROUND SPEED (Approx. Km/H) (Forward/Reverse)	0 - 24.1 KM/H / 0 - 9.7 KM/H	0 - 24.1 KM/H / 0 - 9.7 KM/H	
STARTER	ELECTRIC	ELECTRIC	
DECK			
DECK MATERIAL	7 GA. STEEL WITH .25 IN. SPINDLE REINFORCEMENT	7 GA. STEEL WITH .25 IN. SPINDLE REINFORCEMENT	
DECK CONSTRUCTION	FABRICATED X-FACTOR® 3	FABRICATED X-FACTOR® 3	
NUMBER OF SPINDLES	3	3	
BLADE TIP SPEED (FPM)	18,000	18,000	
SPINDLE HOUSING	FORGED ALUMINUM	FORGED ALUMINUM	
SPINDLE BEARINGS	BALL BEARING	BALL BEARING	
DECK ENGAGEMENT	ELECTRIC CLUTCH OGURA® GT 3.5	ELECTRIC CLUTCH OGURA® GT 3.5	
DECK LIFT SYSTEM	FOOT OPERATED	FOOT OPERATED	
CUTTING WIDTH	60"	72"	
CUTTING HEIGHTS	25 MM - 140 MM	25 MM - 140 MM	
CUTTING POSITIONS	19	19	
WHEELS			
FRONT	15 IN X 6 IN - 6 IN SMOOTH PNEUMATIC	15 IN X 6 IN - 6 IN SMOOTH PNEUMATIC	
REAR	26 IN X 12 IN - 16 IN LOW PROFILE RADIAL TURF	26 IN X 12 IN - 16 IN LOW PROFILE RADIAL TURF	
FEATURES			
SEAT	HIGH BACK BOLSTERED WITH SUSPENSION POD SYSTEM	HIGH BACK BOLSTERED WITH SUSPENSION POD SYSTEM	
FOLDABLE ROPS	STANDARD	STANDARD	
MACHINE			
WEIGHT	726.1KG	746KG	753.3KG
LENGTH	2108 MM	2108 MM	
WIDTH (W/O CHUTE)	1600 MM	1905 MM	
WIDTH (W/ CHUTE)	1905 MM	2210 MM	
HEIGHT (W/ ROPS EXT)	1816 MM	1816 MM	
HEIGHT (W/ ROPS DOWN)	1214 MM	1214 MM	
WARRANTY			
UNIT	MACHINE WARRANTY - 5 YEARS OR 1500 HOURS	MACHINE WARRANTY - 5 YEARS OR 1500 HOURS	
DECK SHELL & FRAME	LIMITED LIFETIME	LIMITED LIFETIME	
ATTACHMENTS & ACCESSORIES			
	BAGGER, BAGGER COMPLETION KIT, TRAILER HITCH KIT, MULCH KIT, HEADLIGHT KIT, LASER EDGE MOWER BLADES KIT		

* Special order



PRO-TURN®

300 500



AVAILABLE IN:



COMFORT AND DURABILITY, MOW AFTER MOW AFTER MOW

The Pro-Turn® 352 and 560 are hard-working mowers built to keep you comfortable from dawn to dusk. This is mowing to the next-level thanks to their innovative features and superior cutting performance.



	PRO-TURN® 352*	PRO-TURN® 560*
MODEL NUMBER	992521	992511
ENGINE	KAWASAKI® FX 691 V-TWIN	KAWASAKI® FX 921 V-TWIN
HORSEPOWER	22 HP	31 HP
DISPLACEMENT	726 CC	999 CC
DRIVE SYSTEM	PARKER HTJ TRANSMISSION	PARKER HTG TRANSMISSION
FUEL CAPACITY	47.3 L	47.3 L
GROUND SPEED (Approx. Km/H) (Forward/Reverse)	0 - 17.7 KM/H / 0 - 8 KM/H	0 - 24.1 KM/H / 0 - 9.7 KM/H
STARTER	ELECTRIC	ELECTRIC
DECK		
DECK MATERIAL	7 GA. STEEL WITH .25 IN. SPINDLE REINFORCEMENT	7 GA. STEEL WITH .25 IN. SPINDLE REINFORCEMENT
DECK CONSTRUCTION	FABRICATED X-FACTOR® 3	FABRICATED X-FACTOR® 3
NUMBER OF SPINDLES	3	3
BLADE TIP SPEED (FPM)	18,000	18,000
SPINDLE HOUSING	FORGED ALUMINUM	FORGED ALUMINUM
SPINDLE BEARINGS	BALL BEARING	BALL BEARING
DECK ENGAGEMENT	ELECTRIC CLUTCH OGURA® GT 2.75	ELECTRIC CLUTCH OGURA® GT 3.5
DECK LIFT SYSTEM	FOOT OPERATED	FOOT OPERATED
CUTTING WIDTH	52"	60"
CUTTING HEIGHTS	25 MM - 140 MM	25 MM - 140 MM
CUTTING POSITIONS	19	19
WHEELS		
FRONT AXLE	FIXED, GREASEABLE CASTER FORK TUBES	FIXED, GREASEABLE CASTER FORK TUBES
FRONT	15 IN X 6 IN - 6 IN SMOOTH PNEUMATIC	15 IN X 6 IN - 6 IN SMOOTH PNEUMATIC
REAR	24 IN X 12 IN - 16 IN BIAS PLY TURF	26 IN X 12 IN - 16 IN RADIAL TURF
FEATURES		
SEAT	ISOLATED SUSPENSION PLUSH SEAT WITH ARM RESTS	AIR RIDE PLUSH SEAT WITH ARM RESTS
FOLDABLE ROPS	STANDARD	STANDARD
MACHINE		
WEIGHT	598.6KG	674.4KG
LENGTH	2134 MM	2134 MM
WIDTH (W/O CHUTE)	1397 MM	1600 MM
WIDTH (W/ CHUTE)	1702 MM	1905 MM
HEIGHT (W/ ROPS EXT)	1930 MM	1930 MM
HEIGHT (W/ ROPS DOWN)	1214 MM	1214 MM
WARRANTY		
UNIT	5 YEAR/1500 HOUR COMMERCIAL/NO HOUR LIMIT FIRST 2 YEARS	5 YEAR/1500 HOUR COMMERCIAL/NO HOUR LIMIT FIRST 2 YEARS
DECK SHELL & FRAME	LIMITED LIFETIME	LIMITED LIFETIME
ATTACHMENTS & ACCESSORIES	BAGGER, BAGGER COMPLETION KIT, TRAILER HITCH KIT, MULCH KIT, HEADLIGHT KIT	



PRO-TURN® ZX



AVAILABLE IN:

48" | 52"

4YR
FOUR YEAR OR 750 HOUR
WARRANTY

GET MUCH MORE THAN YOU PAY FOR

The Pro-Turn® ZX 48 and 52 provides solid construction which will tackle the toughest commercial jobs and leave a beautifully manicured lawn in its wake. This mower was built to not just exceed expectations but to redefine them.



Kawasaki® FX Engine

Delivers reliable power and performance and is equipped with commercial canister air filtration for maximum power and torque, no matter how tough the conditions.



Seat Suspension

The seat is adjustable and has the new addition of a low-profile seat mechanism for added comfort.




Suspension Forks

Absorb those big impacts so your body doesn't, further improving the ride and decreasing fatigue.

	PRO-TURN® ZX 48	PRO-TURN® ZX 52
MODEL NUMBER	991286	991288
ENGINE	KAWASAKI® FX 691 V-TWIN	KAWASAKI® FX 691 V-TWIN
HORSEPOWER	22 HP	22 HP
DISPLACEMENT	726 CC	726 CC
DRIVE SYSTEM	HYDRO-GEAR® ZT-3200	HYDRO-GEAR® ZT-3200
FUEL CAPACITY	18.9 L	18.9 L
GROUND SPEED (Approx. Km/H) (Forward/Reverse)	0 - 13.7 KM/H / 0 - 6.4 KM/H	0 - 13.7 KM/H / 0 - 6.4 KM/H
STARTER	ELECTRIC	ELECTRIC
DECK		
DECK MATERIAL	10 GA. STEEL	10 GA. STEEL
DECK CONSTRUCTION	FABRICATED X-FACTOR® 3	FABRICATED X-FACTOR® 3
NUMBER OF SPINDLES	3	3
BLADE TIP SPEED (FPM)	18,000	18,000
SPINDLE HOUSING	FORGED ALUMINUM	FORGED ALUMINUM
SPINDLE BEARINGS	BALL BEARING	BALL BEARING
DECK ENGAGEMENT	ELECTRIC CLUTCH OGURA® GT 1.5	ELECTRIC CLUTCH OGURA® GT 1.5
CUTTING WIDTH	48"	52"
CUTTING HEIGHTS	38.1 MM - 127 MM	38.1 MM - 127 MM
CUTTING POSITIONS	15	15
WHEELS		
FRONT	13 IN X 6.5 IN - 6 IN SMOOTH PNEUMATIC	13 IN X 6.5 IN - 6 IN SMOOTH PNEUMATIC
REAR	22 IN X 10 IN - 12 IN TURF	22 IN X 10.5 IN - 12 IN TURF
MACHINE		
WEIGHT	419.5KG	422.2KG
LENGTH	2007 MM	2007 MM
WIDTH (W/O CHUTE)	1290 MM	1428 MM
WIDTH (W/ CHUTE)	1572 MM	1709 MM
HEIGHT (W/ ROPS EXT)	1829 MM	1829 MM
HEIGHT (W/ ROPS DOWN)	1321 MM	1321 MM
WARRANTY		
UNIT	MACHINE WARRANTY - 4 YEARS OR 750 HOURS LIMITED	MACHINE WARRANTY - 4 YEARS OR 750 HOURS LIMITED
DECK SHELL & FRAME	LIMITED LIFETIME	LIMITED LIFETIME
ATTACHMENTS & ACCESSORIES	2 BUCKET BAGGER, BAGGER MOUNT KIT, TRAILER HITCH KIT, MULCHING KIT, LASER EDGE MOWER BLADES KITS	



ACCESSORIES

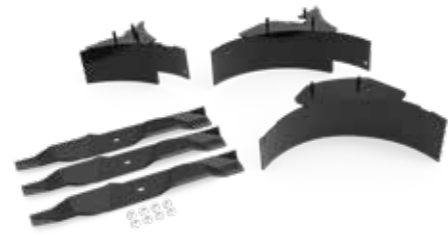

MULCH KIT

Separate cutting chambers for each blade produce smaller clippings for a professionally manicured appearance.



LASEREDGE BLADE

These self-sharpening blades last up to 5 times longer than standard blades, helping to minimize downtime.



BAGGER SYSTEMS

Gravelly's two- and three-bucket mesh bags provide superior airflow and venting.



HITCH KIT

Add a hitch kit to enjoy unmatched versatility with a variety of tow-behind options.



OEM BELTS

Designed to be a perfect fit for your machine, Gravelly OEM belts provide the strength, longevity and quality needed to enhance performance and cut quality.



LIGHT KIT

The LED headlight kit will light your way and keep you cutting long after others call it a day.

CONTACT YOUR LOCAL GRAVELLY DEALER FOR THE FULL RANGE OF GENUINE ACCESSORIES AND PARTS

DISTRIBUTED BY MASPORT LTD - MASPORT.CO.NZ Order No: 543701



G R A V E L Y M O W E R . C O . N Z

Registered trademark and TM trademark of AriensCo. Kohler®, Kawasaki®, Yamaha®, Subaru® and Hydro-Gear® are registered trademarks of their respective companies. The engine horsepower information is provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower will be less. Visit www.gravely.com for a complete listing of engine manufacturer power rating information. Product features and specifications subject to change without notice. Photos are a representation of the product; actual product may vary. © Copyright 2023 AriensCo. All rights reserved.